


NORDMENDETM

HCT62FL

**OPERATING AND INSTALLATION INSTRUCTIONS
BUILT-IN VITROCERAMIC HOB**

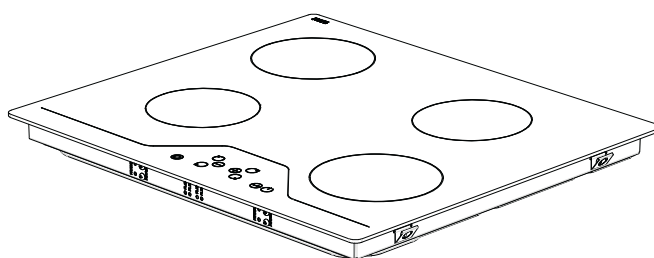

CONTENTS:


DESCRIPTION OF THE HOB	3
SAFETY INSTRUCTIONS	4
INSTALLATON	6
Locating Your Built-in Hob	6
Electrical Connection of Your Hob.....	8
USAGE	10
Turn On and Turn Off The Control	11
Select Heater	11
Turn on dual- and triple zones	12
Set Cooking Level With and Without Heat Boost	12
Turn Off Individual Heaters	13
Timer Function	14
Key Lock	16
Child Lock	17
Stop & Go Function.....	18
TOUCH CONTROL SAFETY FUNCTIONS	20
Sensor Safety Cut Off	20
Over Temperature Switch Off	21
Operating Time Limitations	21
Residual Heat Functions.....	22
CLEANING AND CARE	23

DESCRIPTION OF THE HOB

Dear Customer,

It is important that you should read this manual for best performance and to extend the life of your appliance. We recommend you to keep this manual for future reference.

Your new hob is guaranteed and will give lasting service. This guarantee is only applicable if the appliance has been installed and operated in accordance with the operating and installation instructions detailed in this manual.

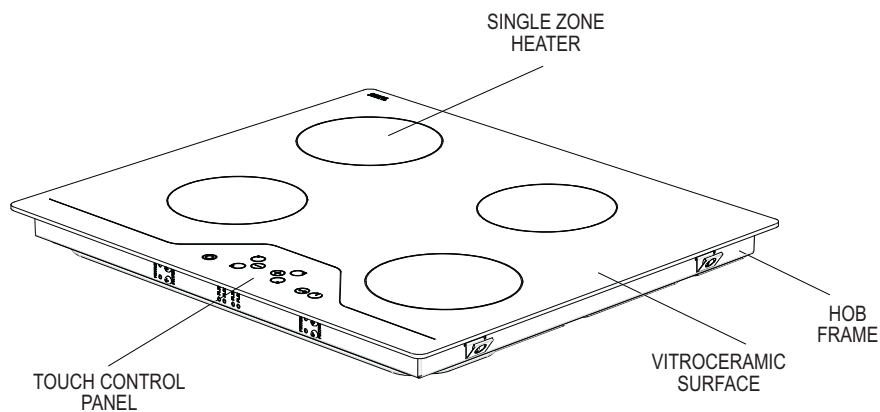


Note: Appearance of your hob maybe different than the model shown above due to its configuration.

SAFETY INSTRUCTIONS

Please comply with these instructions. If you do not, any damage resulting from improper, incorrect or negligent use or improper connection or installation is not covered by the warranty.

- This appliance should be used only for normal domestic use.
- This appliance must only be used for the purpose of heating or cooking food, any other use, for example heating rooms, working surface or storage surface, is dangerous.
- Additions or modifications to the appliance are not permitted.
- Do not place or store flammable liquids, highly inflammable materials or fusible objects on or near the appliance.
- Small children must be kept away from the appliance.
- The appliance may only be installed and connected by an authorised service personal.
- The electrical safety of this hob is guaranteed only if it is connected to a properly earthed system, which complies with the electrical safety standards.
- Built-in appliances may only be used after they have been built in to suitable built-in units and work surfaces that meet the standards.
- Do not put pressure on the power supply cable while fitting the hob.
- Power supply cable length should not exceed 2m for isolation safety.
- In the event of faults with the appliance or damage to the glass ceramic (cracks, scratches or splits), the appliance must be switched off and disconnected from the electrical supply to prevent the possibility of an electric shock.
- Repairs to the appliance must only be carried out by authorised service personal.
- Make sure all the packaging has been removed before you use the appliance.
- Cables from electrical appliances must not touch the hot surface of the appliance or hot cookware.



- Never leave the the appliance hob unattended when cooking with fat or oil
- They can rapidly catch fire if overheated.
- Do not cut any food on the glass of the vitroceramic hob. Glass panels should not be used as working surfaces.
- Be careful when using small household appliances, such as irons, near the elements.
- Do not use the cooking zones with empty cookware or without cookware.
- Make sure all the controls are in the off position when not in use.
- For cleaning, the appliance must be switched off and cooled down.
- For safety reasons, the cleaning of the appliance with steam jet or high-pressure cleaning equipment is not permitted.
- Use only stable flat-based pans.

INSTALLATION

The electrical connection of this hob should be carried out by an authorised service personal or a qualified electrician, according to the instructions in this guide and in compliance with the current regulations.


- Prior to installation, ensure that the local distribution conditions and the adjustment of the appliance are compatible.
- The laws, ordinances, directives and standards in force in the country of use are to be followed (safety regulations, proper recycling in accordance with the regulations, etc.)

Locating your built-in hob

After removing the packaging material from the appliance and its accessories, ensure that the hob is not damaged. If you suspect any damage, do not use the appliance and contact an authorised service personal or a qualified electrician immediately.


- This built-in hob is to be inserted into a cut out of a worktop. It will be electrically connected with the switch box below, especially provided for this purpose.


- Create an opening with the dimensions shown in the picture below. The distance between the rear edge of the hob and any adjacent wall is depend on wall surface. Please don't use easily combustible material like curtain, paper at nearby hob.

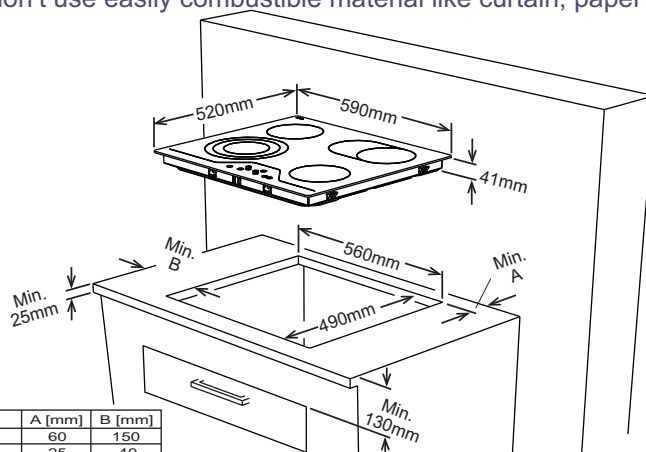

Neighbourhood walls	A [mm]	B [mm]
Combustible	60	150
Non-combustible	25	40

- Apply the one-sided self-adhesive sealing tape supplied all the way round the lower edge of the cooking surface along the outer edge of the glass ceramic panel. Do not stretch it.
- Screw the 4 worktop mounting brackets on the side walls of product.

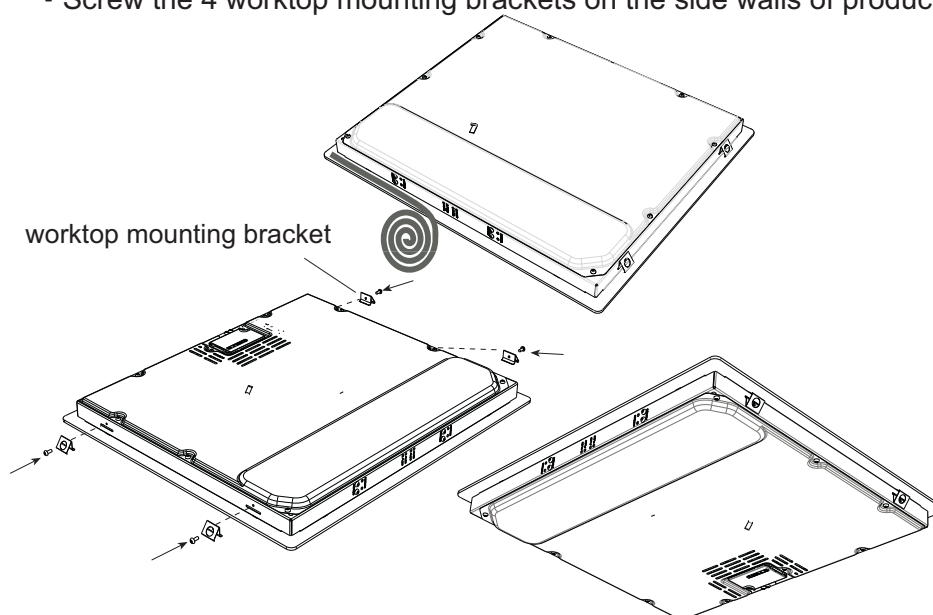





Electrical connection of your hob

- Before proceeding with the electrical connection, verify that the current carrying capacity of the system and the socket is adequate for the maximum power rating of the hob.
- Electrical installation of the residence and the electrical current plug in use must be earthed and conform with safety regulations.
- If there is no dedicated hob circuit and fused switch, they must be installed by a qualified electrician before the hob is connected.
- Fused switch must be easily accessible once the hob has been installed.
- Do not use adaptors, multiple sockets and/or extension leads.
- This appliance conforms with the requirements of the following EEC Directives:
 1. Vitroceramic hob EEC/73/23 and 93/68, EEC/89/336 relating to radio interference,
 2. EEC/89/109 relating to contact with foods.
- A circuit breaker with a contact opening of at least 3 mm, rated 20 A and delayed functioning type must be installed inside the supply circuit.
- Cooking hobs not provided with supply cord.

IMPORTANT : The following diameters of supply cable must be used at least in case of 1 phase connection :

Rated power on nameplate:	Diameter of supply cable:	Rated power on nameplate:	Diameter of supply cable:
5000W - 8700W at 220V:	3 x 2.5 mm ²	> 8700W at 220V:	3 x 4.0 mm ²
5000W - 9100W at 230V:	3 x 2.5 mm ²	> 9100W at 230V:	3 x 4.0 mm ²
5000W - 9500W at 240V:	3 x 2.5 mm ²	> 9500W at 240V:	3 x 4.0 mm ²

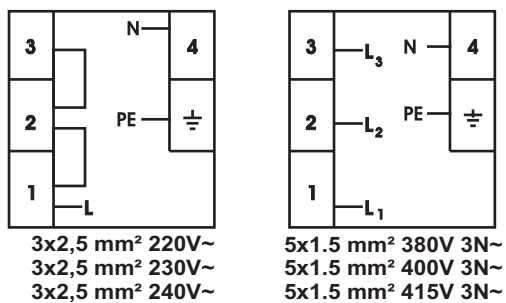

* This appliance must be earthed.

* For this connection a power lead of wire type H05V V-F should be used.

▪ For the touch controlled vitroceramic hob, the cable must be H05VV-F 3X2,5 mm² / 60227 IEC 53. You will find the connection diagram shown on the back of your appliance.


▪ During installation, please insure that isolated cables are used. An incorrect connection might damage your appliance. The guarantee will not cover such damages.

▪ All repairs must be carried out by an authorised service personnel or a qualified electrician.

▪ Unplug your appliance before each maintenance. For reconnection, follow the connection diagrams strictly.


USAGE

The appliance is operated by touching buttons and the functions are confirmed by displays and acoustic signals.

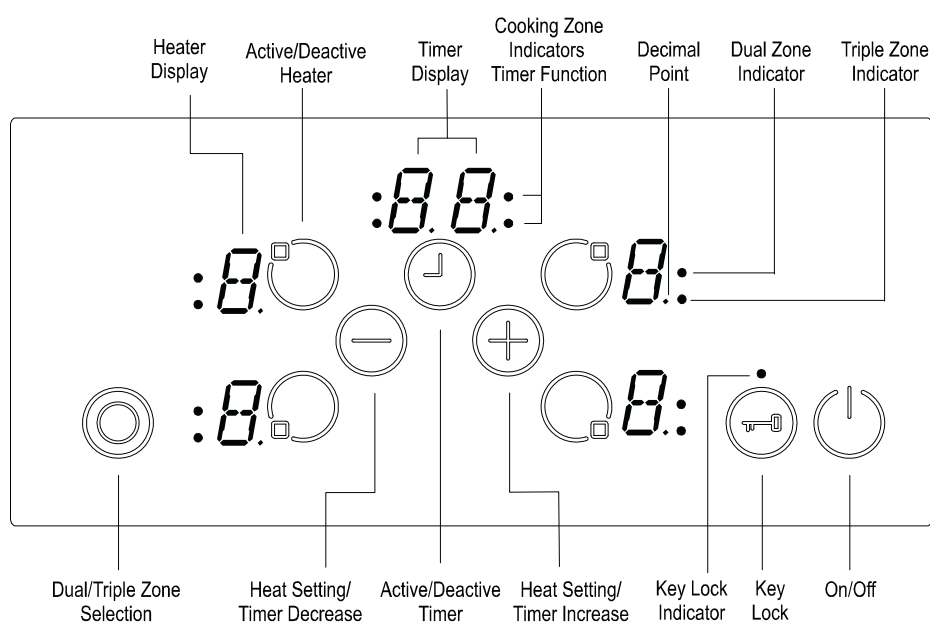

Stand-By-Mode	S-Mode	The mains are applied to the hob control and all heater displays are off or a residual heat display is active.
Operating-Mode	B-Mode	At least one heater display shows a heat setting between '0' and '9'.
Lock Mode	VR-Mode	The hob control is locked.

Mode Descriptions



Turn On and Turn Off The Appliance

If the appliance is in *Stand-By-Mode*, it is put in *Operating-Mode* by pressing the *On/Off* button  at least 1 second. A buzzer signal indicates the successful operation acoustically.

On all heaters a `0` appears and all *Decimal Point* of the heater flashes (1 sec on, 1 sec off).

If there is no operation within 10 sec, the display of all heaters will turn off.

If the displays are turned off, the heater will be set into *Stand-By-Mode*.

If  is pressed more than 2 sec (in *Operating-Mode*), the appliance is switched off and is set into the *S-Mode* again. The appliance can be turned off by pressing  at any time; even if other buttons are pressed simultaneously.

If there is a residual heat of a heater remaining, this will be indicated in the correspondent heat setting *Heater Display*.


Select Heater

If a single heater is chosen with the corresponding *Active/Deactive Heater Button* , the *Decimal Point* of the related *Heater Display* flashes. For the selected heater, you can set the heat level between 1-9 by touching the *Heat Setting Buttons*  or .

The buttons must be pressed within 3 sec, otherwise the heater selection is erased and heat setting dot will disappear (*Decimal Point*). If there is no further operation within 10 sec, the heater falls back into the *S-Mode*.

The heat setting can always be changed by pressing  or  between level 1-9.

Each button operation or each display change is quitted by a buzzer signal.



Turn on dual and triple zones (available only in some models)

Turn on the dual zone

The activation of the dual zone is done after selecting the desired heater by actuating ☉. This is confirmed by a buzzer signal. At the same time, the corresponding *Dual Zone Indicator* goes on statically. Touching ☉ for a second time, the status of the dual zone toggles: it changes from dual zone on to dual zone off and back again.

The extension zone can be activated only, after a level between 1-9 is set on the basic zone of the heater.

Turn on triple zones

A dual or triple zone can only be switched on, if the basic zone of a heater is set to level 1–9 and the heater is selected, the dot is on.

If ☉ is pressed, the buzzer signal sounds and the *Dual Zone Indicator* is statically on. If ☉ is pressed once again, there is another acoustical signal and the triple heater is switched on. The *Triple Zone Indicator* will be illuminated and the triple zone will be energized.


After touching ☉ once again, the triple zone of the heater will be switched off again. Each operation causes a status change of the dual/triple zones following in this manner (Dual zone on, triple zone on, all extended zones off, dual zone on, triple zone on, dual zone on, etc.)

Set Cooking Level With and Without Heat Boost

All heaters are equipped with heat boost functionality.

If the heat boost is active, then the heater will be operated with maximum power for the period of the heat boost time, that is dependent from the selected heat setting. This is indicated through a flashing 'A', alternating with the heat setting value (e.g. 0,5 sec 'A' and 0,5 sec '9') in the heater display. Once the heat boost time ended only the heat setting will be indicated.

If the heat boost should be used for a heater, heater level 9 must be operated by pressing ⊖ starting from level 0. After setting the heat to level 9, 'A' will be indicated alternating. This means that level 9 and heat boost is active now.



The heat boost can be turned off by pressing $\ominus$ until heat setting '0' appears.

If the heat boost should be used, it can always be activated by actuating $\oplus$ again if the heat setting is set to level 9. In the heat display 'A/9' flashes.

Turn Off Individual Heaters

A selective heater can be turned off with 3 different ways:

- Simultaneous operation of $\oplus$ and $\ominus$ buttons
- Reduction of the heat setting to '0' by operating $\ominus$ button
- Use of timer turn off function for the corresponding heater

Simultaneous operation of $\oplus$ and $\ominus$ buttons

The corresponding heater must be chosen with the *Active/Deactive Heater Button* $\odot$, the *Decimal Point* of the related *Heater Display* flashes. To turn off the heater, $\oplus$ and $\ominus$ must be pressed at the same time. A buzzer signal sounds and '0' appears in the heat setting display.

If the timer is active for the selected heater, then '0' will appear in the heater display and also the related timer *Cooking Zone Indicator Timer Function* and the *Timer Display* is turned off.

If there is a residual heat for this heater remaining, this will be indicated by a static display 'H' in the heat setting display.

Reduction of the heat setting to '0' by operating $\ominus$ button

The heater can also be turned off by reducing the operated heat setting to '0'.

When *Heater Display* indicates '0', an associated *Decimal Point* of the heater will also be turned off.

Turning off an active heater, not only the '0' appears in the *Heater Display*, but also the related timer *Cooking Zone Indicator* and the *Timer Display* is turned off.

If there is a residual heat for this heater remaining, this will be indicated by a static display 'H' in the heat setting display.

Use of timer turn off function for corresponding heater (available only in some models)

After reaching a remaining time of 0 minutes, the timer stops the linked heater, showing the '0' shown in the *Heater Display* and shuts down *Timer Display*. In the *Timer Display* is shown '00'. The related timer *Cooking Zone Indicator* disappears.

An assigned *Dual/Triple Zone Selection Indicator* also disappears if it is active.

Additionally the buzzer indicates acoustically the timer run out. After confirmation of the timer run out by touching any button, the buzzer goes silent.

Timer Function (available only in some models)

The timer provides following features:

The control can run max. 4 heater assigned timers and 1 minute minder (which is assigned to no heater) simultaneously.

All timers can be used only in *B-Mode*. A heater timer can only be assigned to a active heater, running in levels between 1-9. The minute minder is independent of any heater.

In order to use both functions, timer function must be activated by the *Active/Deactive Timer* button .

Touching  for the first time after activating the heaters, the control proposes the minute minder (no *Cooking Zone Indicator* is flashing, they are all on or off).

Touching  for the second time, the control proposes the assignment to one of the activated heaters by flashing *Cooking Zone Indicator*. Now the timer to the linked timer signalised.

Touching  again, the next timer in the in the clockwise direction, is proposed for assignment of the next active heater. And so on...

Minute Minder

No matter whether a heater is activated or not, the minute minder can be operated by touching . The appearing '00' shows that timer is active and the dot in the right *Timer Display* indicates that  and  are now linked for setting the timer value.

The minute minder is selected when all *Cooking Zone Indicators* are statically on or off (no *Cooking Zone Indicator* is flashing).

With  and , the timer value can be set.

After successful setting of the minute minder time, the timer starts to decrement the time.

The minute minder will not be stopped by switching off the appliance or activating the key lock function, it will proceed increasing the minutes until run out indication.

After reaching the '00' of the timer, buzzer indicates the run out of time. To stop the buzzer you have to confirm the 'run out' by touching any button.

Heater timer

Heater timers can be set only for activated heaters (heater level must be set between 1-9)


First touch of , the minute minder is activated. After touching  for the second time, the timer is assigned to the activated heater. The proposed assignment is indicated by the related *Cooking Zone Indicator*, who is flashing.

Touching  again after activating the first heater timer, the control recommends the next active heater assigned to the timer in the clockwise direction. The assignment recommendation is indicated by the flashing *Cooking Zone Indicator*.

Touching  and , the timer value for the heater can be set.

The running timer of the first set heater timer is indicated by the statically lighting *Cooking Zone Indicator*.

Touching  once again further timers can be assigned to other activated heaters.



10 sec after the last operation, the timer display changes to the timer that will run out next.

The assignment of that timer is displayed always by a flashing *Cooking Zone Indicator*. How many timer are running you can identify by the number of *Cooking Zone Indicator* that are statically on.

By toggling , you can display the timer values for the heater timer and the minute minder. The assignment is always indicated by the flashing *Cooking Zone Indicator*. If no *Cooking Zone Indicator* flashes, the minute minder time is shown in the 2-digit *Timer Display*.

All heater timers can be erased by switching off the appliance into the *S-Mode* using . A minute minder will not be erased, it will proceed operation until run out.

To erase a timer in *Operation Mode*, you first have to select the timer by toggling the *Active/Deactive Timer Button* until it is displayed. The value can be erased then in 2 different ways:

- Decrement by touching  until '00' appears on the *Timer Display*.
- Touch  and  simultaneously for 0,5sec until '00' is shown in *Timer Display*.

After reaching the '00' of a heater timer, the assigned heater level will be set to '0'.


The heater timer or minute minder run out is indicated acoustically by a buzzer tone. This will be erased by touching any button for acknowledgement.

Key Lock

Key lock functionality is for blocking and set the appliance into a save modus during operation. Touch modifications as for example rise heat settings and others should not be possible. It is only possible to switch the appliance off.

The lock function is active, if the *Key Lock* button  is pressed at least 2 sec. This operation is acknowledged by a buzzer. After successful operation of more than 2 sec, the *Key Lock Indicator* flashes and the heater is locked.

The heater can only be locked in *Operating Mode (B-Mode)*.



If the heater is locked, only  can be operated, all other buttons are blocked. If there is any other button operated in the blocked mode, the buzzer signal sounds and the *Key Lock Indicator* flashes as indication for the activated key lock functionality. Only the switch off by operation of  is possible. But if you switched off the appliance, you can not restart it again without unlocking.


After pressing  2 sec, the *Key Lock Indicator* disappears. Now, the hob control is unlocked and can be operated in normal order.

Child Lock

Child lock functionality is foreseen to lock the appliance in a complicated Multi-Step process.


Child locking and unlocking is only available in the *S-Mode*.

First  has to be pressed until the buzzer beeps, then the  and  have to be pressed for at least 0,5 sec, but max 1 sec. simultaneously. Following that, the appliance can be locked by touching the . All 4 heater displays 'L' is showed as a confirmation.

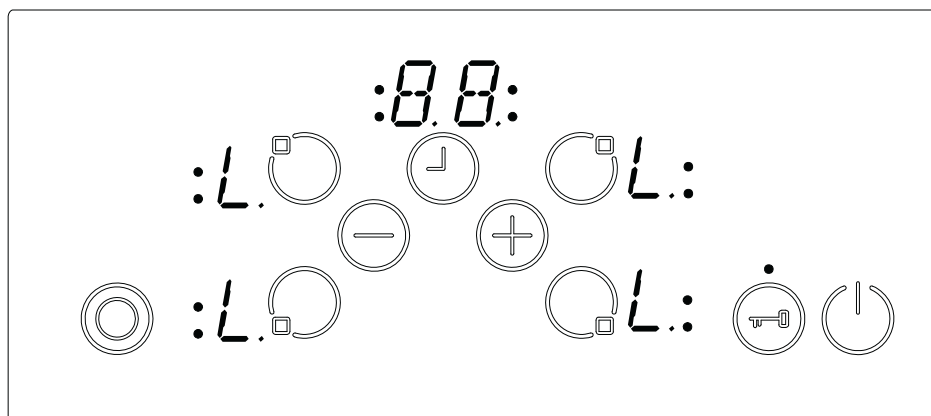

In the case the minute minder is still running, it will proceed until '00' is reached and the timer will beep. After confirmation of timer run out, the appliance is fully locked. None of the buttons can be used as long as the appliance is locked.

The same way the child lock is activated, it can also get deactivated. After pressing  until the beep, then the  and  have to be pressed simultaneously for at least 0,5 sec, followed by touching only the . As a confirmation for successful unlocking, 'L' symbol in the displays will be erased immediately.

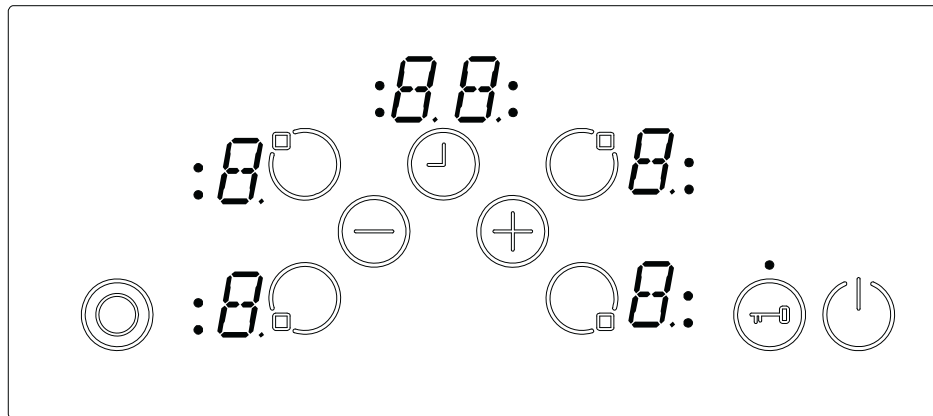

Stop & Go Function (available only in some models)


The Stop & Go functionality can be used only alternatively to Key lock functionality. It is not possible to use both.

The Stop & Go function is activated by pressing  for 1 sec. Afterwards it is acknowledged acoustically by two beeps.

The Stop-function is active and all heaters which are turned on will be reduced to heat setting '1' for 1 minute, then for the remaining 9 minutes a running light with a horizontal bar starting from the bottom to the top is displayed. Afterwards all heaters are reduced to heat setting „0“ for the rest of the time. For all inactive heat settings, there is '0' or the residual heat 'H' indicated.

The heater completely turns off after 10 minutes or after immediate operation of .

If the heater is turned off via , the heater is in *S-Mode* and the Stop-function is deleted. If the heater is turned on again, there is no Stop & Go function.



If the timer is used as minute minder, the time will continue during Stop & Go function.

If the timer is used with the turn off functionality of an assigned heater, then the timer stops decrementing the time during Stop & Go operation. After deactivating the Stop & Go function, the timer will operate again.

If the heat boost for a heater is active, then the expired time of the heat boost is stored and after deactivating the Stop & Go function, the remaining heat boost time will expire (meaning the heat boost time does not continue during the Stop & Go condition).

To deactivate the Stop & Go function,  must be pressed for 1 sec. It is acknowledged acoustically with a beep.

Afterwards release  and actuate any button within 10 sec (except  and ), then the operating conditions active before the Stop & Go operation will be activated again. All reduced heater continue to work with the last chosen heat setting. If no further button or  is actiavted within 10 sec, the heater turns off.

TOUCH CONTROL SAFETY FUNCTIONS


The following safety functions are available to avoid unintended operations of the hob control.

Sensor Safety Cut Off

To prevent the appliance from unwanted, random sensor operation, a sensor monitoring is included.

In case of one or more buttons are pressed longer than 12 sec, the sensor monitoring routine indicates acoustically that wrong operation (pot or other object placed on the button, sensor failure, etc.) and switches off the appliance.


The safety turn off causes that the hob control is turned off to the *S-Mode*. An 'F' will flash in all heater displays.

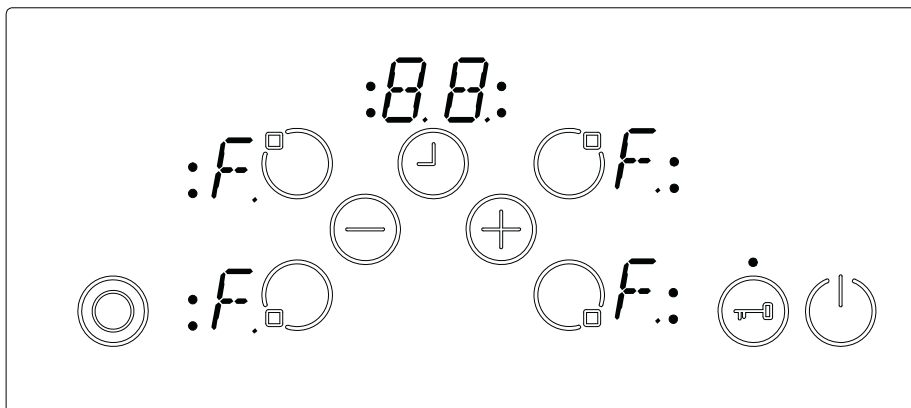

If residual heat is present, it will be displayed in all other heater displays.

The hob control will then go in *S-Mode*. At the same time a buzzer signal appears. After 10 minutes the acoustic signaling will stop.


If there is no erroneous operation present any longer, both the visual and the acoustic signal will disappear.



Over Temperature Switch Off

Due to the placement of the control is very close to the heater in the middle front of the hob, it can occur that a not correctly placed pot half on the control and not sensed by the sensor safety cut off (not covering a button) heats up the hob to a very high temperature, which makes the glass and the buttons untouchable without get burned the finger.

To prevent the hob control unit from damage, the control monitors all the time the temperature and switches off in case of overheating emergency. It is indicated in the heater 4 heater display with the letter 't' for all the time until the temperature decreases.

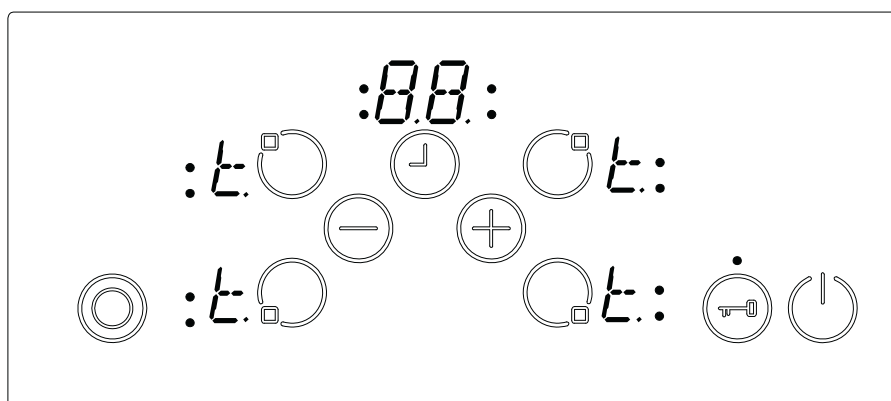

After the temperature falling, the 't' displays will be erased and the hob control unit falls back into the S-Mode. This means that the user can reactivate the appliance by touching .

Operating Time Limitations

The hob control unit has a limitation of the operating time. If the heat setting for this heater has not been changed for a certain time, than the heater will turn off automatically (for 10 sec a '0' is displayed, afterwards the residual heat). The limit of the operating time depends of the selected heat setting. If a timer was associated with the heater than a '00' will be displays on the timer display for 10 sec. Afterwards the timer display turns off.

After an automatic turn off of the heater, as described above, the heater is operable again and the maximum operating time for this heat setting is applied.

Residual Heat Functions

After all cooking processes there is some heat stored in the vitroceramic glass called residual heat. The control can calculate roughly how hot the glass is in the worst case. If the calculated temperature is higher than + 60 ° C, then this will be indicated in the corresponding heater display after the heater or the hob control was turned off. The residual heat display is shown as long as the calculated heater temperature is > + 60 ° C.


The display of the residual heat has the lowest priority and is overwritten by every other display value, during safety turn offs and displaying an error code.

After reapplying the supply voltage to the hob control after an interruption of the supply voltage occurred, causes that the residual heat display flashes, if the corresponding heater had a residual heat of greater + 60 ° C before the power interruption occurred. The display will flash until the max. residual heat time has expired or the heater will be selected and activated.

CLEANING AND CARE

Cookware with rough bottoms should not be used since these can scratch the glass ceramic surface. The bottom of the good cookwares should be as thick and flat as possible. Before use, make sure that cookware bottoms are clean and dry.

Always place the cookware on the cooking zone before it is switched on. If possible, always place the lids on the cookware. Bottom of cookwares must not be smaller or larger than the cooking zones, they should be at the proper size as indicated below, not to waste energy.

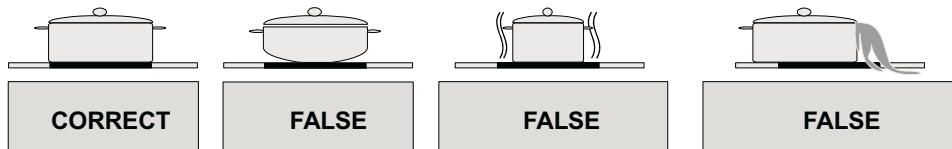

Before cleaning the hob, first remove the plug from the electrical supply socket. Then ensure that there is no residual heat stored in the appliance. Vitroceramic glass is very resistant to high temperature and overheating. If there is residual heat stored in the appliance, 'H' is flashing in the *Heater Display*. In order to avoid burns, let the appliance cool down.

Remove all split food and fat with a window scrape. Then wipe the hob with a suitable washing up liquid and a clean damp cloth. Rub the appliance using a clean dry cloth.

If aluminium foil or plastic items are accidentally melt on the hob surface, they should be immediately removed from the hot cooking area with a scraper. This will avoid any possible damage to the surface. This also applies to sugar or food containing sugar may be spilled on the hob.

In the event of other food melt on the hob surface, remove the dirt when the appliance has cooled down. Use cleaner for glass ceramic or stainless steel when cleaning the surface.

Do not use dishcloth or abrasive sponge to clean the vitroceramic surface. These materials may damage the surface. Do not use chemical detergents, sprays or spot removers on the vitroceramic surface. These materials may cause fire or vitroceramic color fade. Clean with water and washing up liquid.




The symbol on the product or on its packaging indicates that this product may not be treated as household waste. Instead it shall be handed over to the applicable collection point for the recycling of electrical and electronic equipment. By ensuring this product is disposed of correctly, you will help prevent potential negative consequences for the environment and human health, which could otherwise be caused by inappropriate waste handling of this product. For more detailed information about recycling of this product, please contact your local city office, your household waste disposal service or the shop where you purchased the product.

DE

NORDMENDETM

HCT62FL

**Bedienungs- und Installationsanleitung
Glaskeramik-Einbauherd**

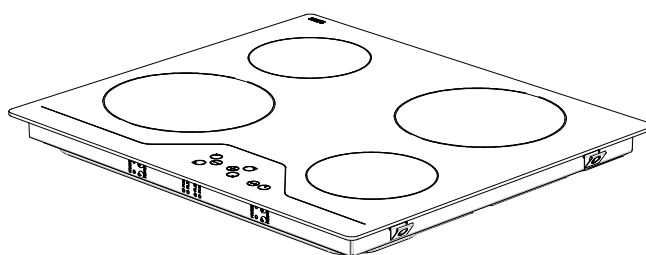

INHALT

- 1. Übersicht über das Gerät**
- 2. Sicherheitshinweise**
- 3. Installation**
- 4. Elektrischer Anschluss**
- 5. Betrieb**
- 6. Touch Control-Sicherheitsfunktionen**
- 7. Reinigung und Pflege**

Lieber Kunde!

Vielen Dank für den Kauf unseres Proline-Kochfeldes. Die Sicherheitshinweise und Empfehlungen in dieser Anleitung dienen Ihrer eigenen Sicherheit und der Sicherheit anderer Personen. Hier erfahren Sie auch, wie Sie die Funktionen Ihres neuen Gerätes optimal nutzen können.

Bitte bewahren Sie diese Anleitung an einem sicheren Ort auf. Eventuell möchten Sie zukünftig darin nachschlagen - zum Beispiel, wenn Fragen während des Betriebes aufkommen oder sich andere Personen mit der Bedienung des Gerätes vertraut machen möchten.

Das Gerät darf nur für seinen bestimmungsgemäßen Einsatzzweck genutzt werden: Zur Zubereitung von Lebensmitteln im Haushalt. Jede andere Art des Einsatzes muss als nicht bestimmungsgemäß und als gefährlich betrachtet werden.

Der Hersteller haftet keinesfalls bei Schäden, die durch den unsachgemäßen oder falschen Einsatz des Gerätes entstehen.

CE-Konformitätserklärung

- Dieses Kochfeld wurde ausschließlich zum Erhitzen von Speisen entwickelt. Jeglicher sonstiger Einsatz (z. B. als Raumheizung) ist bestimmungswidrig und gefährlich.
- Dieses Kochfeld wurde in Übereinstimmung mit folgenden Regelungen entwickelt, konstruiert und vertrieben:
 - Sicherheitsanforderungen der Niederspannungsdirektive 2006/95/EC;
 - Sicherheitsanforderungen der EMV-Direktive 89/336/EC;
 - Anforderungen der Direktive 93/68/EC.




Vor der ersten Inbetriebnahme

Lesen Sie die Anleitung aufmerksam durch, bevor Sie das Gerät installieren und benutzen.

Vergewissern Sie sich nach dem Auspacken, dass nichts beschädigt ist. Im Zweifelsfall wenden Sie sich bitte an Ihren Händler oder an einen qualifizierten Techniker. Entfernen Sie sämtliches Verpackungsmaterial, lassen Sie das Verpackungsmaterial (Kunststoffbeutel, Bänder und ähnliche Dinge) nicht in Kinderhände geraten; diese Dinge können schwere Verletzungen verursachen. Das Verpackungsmaterial ist recyclingfähig.

Die Installation des Gerätes und der Anschluss der elektrischen Verbindungen sollte gemäß gültiger örtlicher Richtlinien und gemäß der Anweisung des Herstellers durch einen qualifizierten Techniker erfolgen.

Versuchen Sie nicht, technische Merkmale des Gerätes zu modifizieren - dies kann zu Gefahren führen.

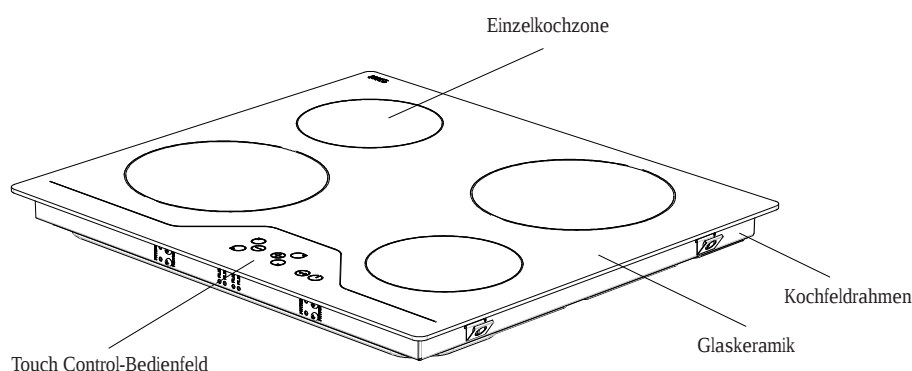

Hinweis: Das Aussehen Ihres Kochfeldes kann wegen Änderungen der Produktion etwas von den Abbildungen abweichen.

Bitte halten Sie sich an diese Hinweise. Andernfalls werden jegliche Schäden, die durch unangemessene, falsche oder fahrlässige Nutzung sowie durch falschen Anschluss oder unsachgemäße Installation entstehen, nicht durch die Garantie abgedeckt.

- Dieses Gerät ist ausschließlich für den Einsatz im Haushalt ausgelegt; jeglicher anderer Einsatz kann die Garantie erlöschen lassen und kann darüber hinaus gefährlich sein.
- Dieses Gerät darf ausschließlich zum Erhitzen und Kochen von Lebensmitteln genutzt werden; jegliche andere (missbräuchliche) Verwendung - z. B. als Raumheizung, Arbeitsplatte oder Ablage - ist gefährlich.
- Erweiterungen oder Modifikationen des Gerätes sind nicht zulässig.
- Platzieren und lagern Sie brennbare Flüssigkeiten, leicht entflammbare Materialien und Gegenstände, die schmelzen können, nicht auf oder in der Nähe des Gerätes.
- Kinder müssen grundsätzlich vom Gerät ferngehalten werden.
- Das Gerät darf nur von einem autorisierten und qualifizierten Installateur installiert und angeschlossen werden.
- Die elektrische Sicherheit Ihres Kochfeldes ist nur dann gewährleistet, wenn es ordnungsgemäß geerdet an Systeme angeschlossen wird, die den Richtlinien für elektrische Sicherheit entsprechen.
- Einbaugeräte dürfen nur benutzt werden, wenn sie in für den Einbau geeignete Möbel oder Arbeitsplatten eingesetzt werden, die den zutreffenden Richtlinien entsprechen.
- Üben Sie beim Einbauen des Kochfeldes keinen Druck auf das Netzkabel aus.
- Aus Gründen der Isolationssicherheit sollte die Länge des Netzkabels 2 m nicht überschreiten.
- Bei Fehlfunktionen des Gerätes oder Beschädigungen der Glaskeramik (Risse oder Sprünge) muss das Gerät ausgeschaltet und von der Stromversorgung getrennt werden, damit es nicht zu Stromschlägen kommen kann.
- Reparaturen des Gerätes dürfen nur von autorisierten Fachkräften durchgeführt werden.
- Überzeugen Sie sich davon, dass sämtliches Verpackungsmaterial restlos entfernt wurde, bevor Sie das Gerät benutzen.
- Kabel von Elektrogeräten dürfen keine heißen Flächen von anderen Geräten oder heißes Kochgeschirr berühren.
- Lassen Sie das Kochfeld niemals unbeaufsichtigt, wenn Sie mit Fett oder Öl kochen. Bei Überhitzung kann es schnell zur Entzündung kommen.
- Schneiden Sie keine Lebensmittel auf der Glaskeramik. Die Glasfläche darf nicht als Arbeitsplatte missbraucht werden.

-
- Geben Sie gut Acht, wenn Sie kleine Haushaltsgeräte wie Bügeleisen in der Nähe der Glaskeramik verwenden.
 - Benutzen Sie die Kochzonen nicht, wenn sich leeres Kochgeschirr oder überhaupt kein Kochgeschirr darauf befindet.
 - Vergewissern Sie sich, dass sämtliche Bedienelemente abgeschaltet sind, wenn Sie das Gerät nicht benutzen.
 - Vor dem Reinigen muss das Gerät von der Stromversorgung getrennt werden und abgekühlt sein.
 - Benutzen Sie keine Dampfreiniger zum Reinigen des Gerätes - dadurch kann das Gerät beschädigt werden und die Garantie erlöschen.
 - Benutzen Sie nur stabiles Kochgeschirr mit flachem Boden.

WARNUNG

Bei korrekter Installation erfüllt Ihr Produkt sämtliche Sicherheitsanforderungen, die für diese Produktkategorie festgelegt wurden. Allerdings sollten Sie im Hinblick auf die Unterseite des Gerätes eine gewisse Vorsicht walten lassen: Dieser Bereich sollte normalerweise nicht zugänglich sein; hier finden sich eventuell scharfe Kanten, die zu Verletzungen führen können.

Brandgefahr! Legen Sie keine brennbaren Materialien auf dem Kochfeld ab. Vergewissern Sie sich, dass in der Nähe verlaufende Stromkabel nicht mit der Oberseite des Kochfeldes in Berührung kommen können.

Lassen Sie keine schweren und/oder spitzen Objekte auf die Glaskeramik fallen. Falls das Kochfeld gesprungen oder anderweitig beschädigt sein sollte, trennen Sie die Stromversorgung und wenden sich an den Kundendienst.

Kratzen Sie nicht mit scharfen Gegenständen über das Kochfeld. Missbrauchen Sie das Kochfeld nicht als Arbeitsfläche.

Bevor Sie ein Altgerät entsorgen, sollten Sie es unbrauchbar machen und dafür sorgen, dass sich keine potentiell gefährlichen Teile mehr daran befinden.

Wichtig: Dieses Gerät wurde ausschließlich für den Hausgebrauch konzipiert. Das Gerät eignet sich NICHT zum Einsatz im kommerziellen, halb-kommerziellen oder öffentlichen Umfeld.

Falls das Netzkabel beschädigt sein sollte, muss es vom Hersteller, einer seiner Kundendienstniederlassungen oder einer ähnlich qualifizierten Fachkraft instandgesetzt werden, damit es nicht zu Gefährdungen durch Stromschlag kommen kann.


Der elektrische Anschluss dieses Kochfeldes sollte von einer autorisierten Fachkraft oder einem qualifizierten Elektriker ausgeführt werden; dabei sind die Anweisungen in dieser Anleitung sowie zutreffende Richtlinien zu beachten.

- Überzeugen Sie sich vor der Installation, dass örtliche Stromversorgung und Einstellung des Gerätes aufeinander abgestimmt sind.
- Gültige Gesetze, Vorschriften, Direktiven und Richtlinien des Landes, in dem das Gerät genutzt wird, müssen eingehalten werden (z. B. Sicherheitsbestimmungen, sachgerechte Entsorgung, etc.).


Einbaukochfeld platzieren

Entfernen Sie zunächst sämtliches Verpackungsmaterial vom Gerät und von seinen Zubehörteilen, überzeugen Sie sich davon, dass das Kochfeld nicht beschädigt ist. Falls Sie jegliche Beschädigungen feststellen oder auch nur vermuten, benutzen Sie das Gerät nicht, sondern setzen sich sofort mit dem autorisierten Kundendienst oder einem qualifizierten Techniker in Verbindung.



- Ihr Einbaukochfeld wird in den Ausschnitt einer Arbeitsplatte eingesetzt. Die elektrische Verbindung mit dem Stromnetz wird über einen speziellen Verteiler unterhalb der Arbeitsplatte hergestellt.
- Beim Ausschneiden der Aussparung orientieren Sie sich bitte an den in der nachstehenden Abbildung angegebenen Abmessungen.

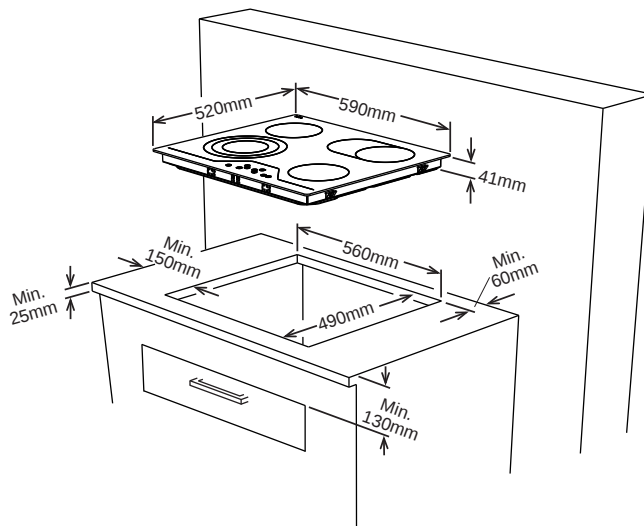

-
- Verlegen Sie das einseitig klebende Dichtungsband um die gesamte äußere Unterseitenkante des Kochfeldes. Dehnen Sie das Band nicht.
 - Schrauben Sie die 4 Arbeitsplattenklemmen an die Seitenflächen des Produktes.

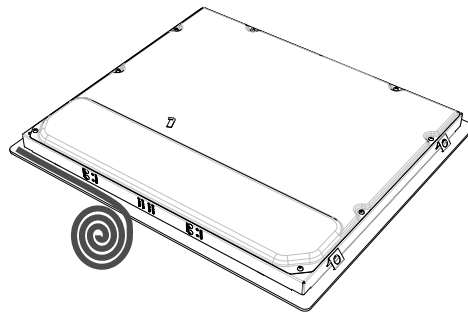


Arbeitsplattenklemme

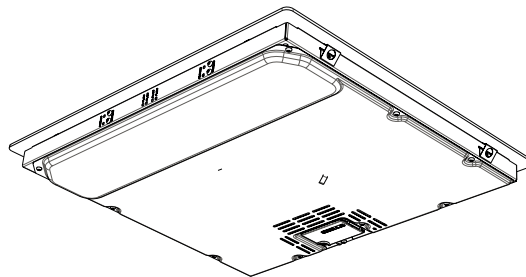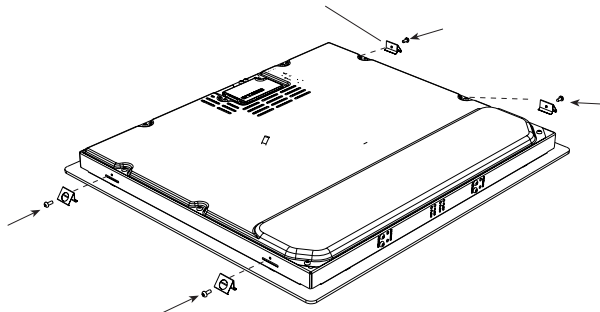


Elektrischer Anschluss

- Bevor Sie mit dem elektrischen Anschluss beginnen, überzeugen Sie sich zunächst davon, dass Stromversorgung und Steckdose für den maximalen Leistungsbedarf des Kochfeldes ausgelegt sind.
- Die elektrische Installation im Haus sowie der Netzstecker müssen geerdet sein und den Vorschriften zur elektrischen Sicherheit entsprechen.
- Falls kein separater Stromkreis mit eigener Sicherung für das Kochfeld vorhanden sein sollte, müssen diese Dinge von einem qualifizierten Elektriker eingerichtet werden, bevor das Kochfeld angeschlossen wird.
- Ein mit einer Sicherung abgesicherter Schalter muss auch nach der Installation des Kochfeldes frei zugänglich bleiben.
- Verwenden Sie keinerlei Adapter, Mehrfachsteckdosen und/oder Verlängerungskabel.
- Dieses Gerät erfüllt die Anforderungen der folgenden Direktiven der europäischen Gemeinschaft:
 1. Glaskeramik-Kochfeld EEC/73/23 und 93/68, EEC/89/336 hinsichtlich Funkstörungen,
 2. EEC/89/109 hinsichtlich Kontakt mit Lebensmitteln.
- Ein 20 A-Unterbrecher mit einer Kontaktöffnung von mindestens 3 mm und verzögerter Auslösung muss in den Versorgungskreis eingeschliffen werden.

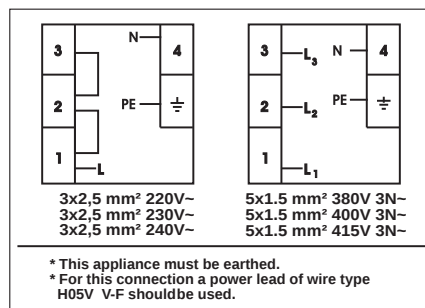

- Das Netzkabel muss dem Typ H05VV-F 3 x 2,5 mm² / 60227 IEC 53 entsprechen. Ein Anschlussdiagramm finden Sie an der Rückseite des Gerätes.
- Achten Sie bei der Installation darauf, ausschließlich ausreichend isolierte Kabel zu verwenden. Durch unsachgemäß ausgeführte Verbindungen kann Ihr Gerät beschädigt werden. Solche Schäden werden nicht durch die Garantie abgedeckt.
- Sämtliche Reparaturen müssen durch autorisierte Fachkräfte oder einen qualifizierten Elektriker ausgeführt werden.
- Ziehen Sie grundsätzlich den Netzstecker, bevor Wartungsarbeiten ausgeführt werden. Beim Wiederanschluss halten Sie sich bitte an die Anschlussdiagramme.

Das Gerät wird über Sensortasten ("Touch Control") bedient, sämtliche Funktionen werden durch optische und akustische Signale bestätigt.
HINWEIS: Falls in den Anzeigen ein blinkendes "H" angezeigt werden sollte, lesen Sie bitte im Abschnitt "Kochfeld zurücksetzen" nach.

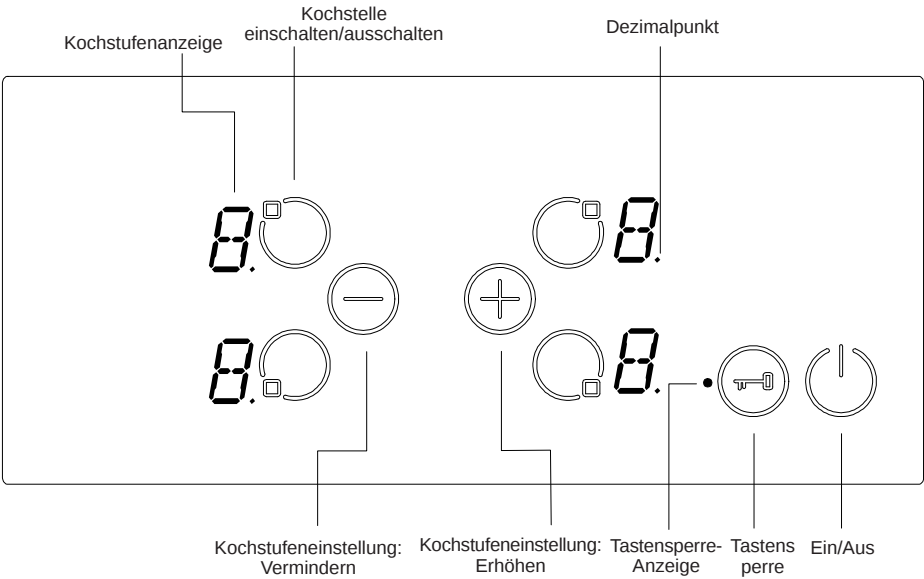

Bereitschaftsmodus	S-Modus	Das Gerät wird mit Strom versorgt, sämtliche Kochstufenanzeigen sind ausgeschaltet; eventuell leuchtet die Restwärmeanzeige.
Betriebsmodus	B-Modus	Mindestens eine Kochstufenanzeige zeigt eine Kochstufeneinstellung zwischen 0 und 9.
Gesperrter Modus	VR-Modus	Das Bedienfeld ist gesperrt.

Beschreibungen der Modi

Gerät ein- und ausschalten.

Wenn sich das Gerät im Bereitschaftsmodus befindet, können Sie es in den Betriebsmodus versetzen, indem Sie die Ein-/Austaste $\odot$ mindestens 1 Sekunde lang gedrückt halten. Der Vorgang wird durch ein akustisches Signal bestätigt.

Bei sämtlichen Kochstellen wird die Kochstufe 0 angezeigt, die Dezimalpunkte in sämtlichen Kochstufenanzeigen blinken.

Wenn innerhalb 10 Sekunden keine Tasten betätigt werden, schaltet sich die Anzeige für sämtliche Kochstellen aus.

Wenn sich die Anzeigen abschalten, werden auch sämtliche Kochstellen abgeschaltet.

Wenn Sie $\odot$ (im Betriebsmodus) länger als 2 Sekunden gedrückt halten, schaltet sich das Gerät ab. Sie können das Gerät jederzeit durch Drücken von $\odot$ abschalten; auch dann, wenn vorher andere Tasten betätigt wurden.

Falls noch Restwärme vorhanden ist, wird dies durch ein blinkendes "H" in der Anzeige der entsprechenden Kochstelle angezeigt.

Kochstelle auswählen

Wenn eine einzelne Kochstelle über die zugehörige Taste Kochstelle einschalten/ausschalten $\odot$ ausgewählt wird, blinkt der Dezimalpunkt in der Anzeige der jeweiligen Kochstelle. Sie können nun die Kochstufe der ausgewählten Kochstelle durch Berühren der Kochstufeneinstellungstasten $\oplus$ oder $\ominus$ im Bereich 1 bis 9 einstellen.

Die Tasten müssen innerhalb von 3 Sekunden betätigt werden. Andernfalls wird die Auswahl der Kochstelle wieder aufgehoben, der Dezimalpunkt verschwindet aus der Anzeige. Falls innerhalb von 10 Sekunden keine weitere Eingabe stattfindet, wird die Kochstelle wieder abgeschaltet.

Die Kochstufeneinstellung kann jederzeit durch Betätigen von $\oplus$ oder $\ominus$ im Bereich von 1 bis 9 geändert werden.

Jede Tastenbetätigung und jede Änderung der Anzeige wird von einem akustischen Signalton begleitet.

Kochstufe mit und ohne Zusatzhitze einstellen

Sämtliche Kochstellen sind mit einer Zusatzhitze-Funktion ausgestattet.

Wenn die Zusatzhitze aktiv ist, heizt sich die Kochstelle über einen bestimmten Zeitraum, der von der gewählten Kochstufeneinstellung abhängt, mit Maximalleistung auf. Dies wird durch ein blinkendes A, das abwechselnd mit der Kochstufeneinstellung angezeigt wird (z. B. erst A, dann 9) in der Kochstufenanzeige dargestellt. Nach Ablauf der Zusatzhitze-Zeit wird lediglich die Kochstufeneinstellung angezeigt.

Wenn Sie die Zusatzhitze-Funktion in der Stufe 9 nutzen möchten, wählen Sie die Kochstufe 9 mit $\ominus$ (wählen also "rückwärts" ab Stufe 0). Nachdem Sie die Stufe 9 ausgewählt haben, werden abwechselnd A und die Kochstufe angezeigt. Dies bedeutet, dass Kochstufe 9 und Zusatzhitze aktiv sind. Wenn Sie eine niedrigere Kochstufe auswählen möchten, drücken Sie die Taste $\ominus$ entsprechend mehrmals.

Sie können die Zusatzhitze abschalten, indem Sie $\ominus$ drücken, bis die Einstellung 0 ausgewählt ist.

Die Zusatzhitze kann jederzeit zugeschaltet werden, indem Sie $\oplus$ betätigen, bis die Stufe 9 ausgewählt ist. A/9 blinkt in der Kochstufenanzeige.

Einzelne Kochstellen abschalten

Sie können einzelne Kochstellen auf zwei Weisen abschalten:

- Durch gleichzeitiges Betätigen der Tasten $\oplus$ und $\ominus$.
- Durch Reduzieren der Kochstufeneinstellung auf 0 durch Betätigen der Taste $\ominus$.

Tasten $\oplus$ und $\ominus$ gleichzeitig betätigen

Die entsprechende Kochstelle wird mit einer der Tasten Kochstelle einschalten/ausschalten $\odot$ ausgewählt, der Dezimalpunkt in der Anzeige der jeweiligen Kochstelle beginnt zu blinken.

Zum Abschalten der Kochstelle betätigen Sie die Tasten $\oplus$ und $\ominus$ gleichzeitig. Ein akustisches Signal erklingt, "0" erscheint in der Kochstufenanzeige.

Falls bei dieser Kochstelle noch Restwärme vorhanden ist, wird dies durch ein blinkendes "H" in der Kochstufenanzeige angezeigt.

Kochstufeneinstellung durch Betätigen der Taste $\ominus$ auf "0" reduzieren.

Sie können eine Kochstelle auch abschalten, indem Sie die Kochstufe auf 0 reduzieren.

Wenn "0" in der Kochstufenanzeige angezeigt wird, erlischt auch der Dezimalpunkt in der Anzeige der ausgewählten Kochstelle.

Falls bei dieser Kochstelle noch Restwärme vorhanden ist, wird dies durch ein blinkendes "H" in der Kochstufenanzeige angezeigt.

Tastensperre

Mit der Tastensperre blockieren Sie das Gerät im Betrieb und versetzen es in einen sicheren Betriebsmodus. Änderungen (beispielsweise Erhöhen der Kochstufeneinstellung) sind nicht möglich. Das Gerät kann lediglich ausgeschaltet werden.

Zum Sperren des aktuellen Betriebsmodus halten Sie die Tastensperre-Taste  mindestens 2 Sekunden lang gedrückt. Dieser Vorgang wird durch einen Signalton bestätigt. Die Tastensperre-Anzeige blinkt, die Bedienelemente sind gesperrt.

Das Gerät kann nur im Betriebsmodus gesperrt werden.

Wenn das Gerät gesperrt ist, kann lediglich die Taste  betätigt werden; sämtliche anderen Tasten sind deaktiviert. Wenn Sie das Gerät abschalten, müssen Sie die Tastensperre-Taste nach dem Wiedereinschalten erneut betätigen, bevor Sie das Gerät bedienen können.

Die Tastensperre-Anzeige verschwindet, nachdem die Taste  2 Sekunden lang betätigt wurde. Das Bedienfeld des Gerätes ist nun freigegeben und kann normal bedient werden.


Die folgenden Sicherheitsfunktionen wirken, um unbeabsichtigte Betätigung der Kochfeld-Bedienelemente zu unterbinden.

Sensor-Sicherheitsabschaltung

Um unerwünschte, zufällige Betätigung von Sensortasten zu vermeiden, werden die Sensortasten auf bestimmte Weise überwacht.

Falls eine oder mehrere Tasten länger als 12 Sekunden lang betätigt werden, wird dieser Zustand (zum Beispiel ausgelöst durch Kochgeschirr, das auf der Sensortaste abgestellt wurde oder Fehlfunktionen des Sensors) durch ein akustische Signal angezeigt und das Gerät abgeschaltet.

Bei der Sicherheitsabschaltung wechselt das Kochfeld in den Bereitschaftsmodus. Bevor das Gerät in den Bereitschaftsmodus wechselt, blinkt ein "F" in sämtlichen Kochstellenanzeigen.

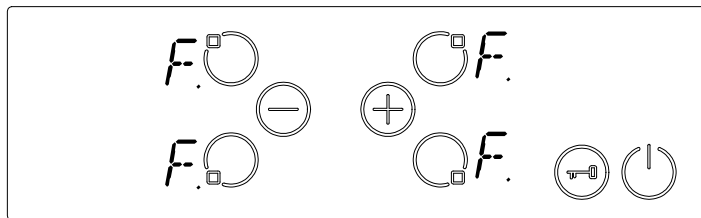


Falls Restwärme vorhanden ist, blinkt ein "H" in den entsprechenden Kochstellenanzeigen.

Abschaltung bei Überhitzung

Da sich das Bedienfeld in der Nähe der beiden vorderen Kochstellen befindet, kann es sich stark erwärmen, wenn Kochgeschirr so unglücklich abgestellt wurde, dass seine Kante die Sensortasten zwar nicht berührt, sie durch seine Nähe jedoch stark aufheizt.

Damit das Bedienfeld nicht beschädigt wird, wird seine Temperatur ständig überwacht und das Gerät abgeschaltet, wenn die Temperatur des Bedienfeldes 60 °C überschreitet. In sämtlichen vier Kochstellenanzeigen wird "t" angezeigt, bis das Kochfeld entsprechend abgekühlt ist.

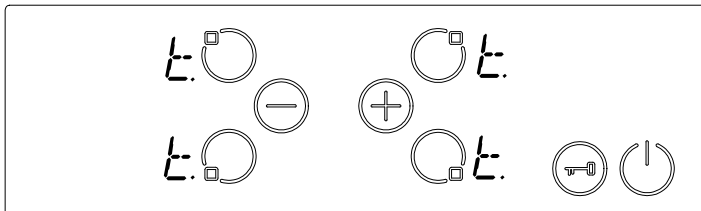

Nachdem das Kochfeld abgekühlt ist, verschwindet das "t" aus der Anzeige, das Gerät wechselt in den Bereitschaftsmodus. Dies bedeutet, dass Sie das Gerät durch Berühren von  wieder einschalten können.

Restwärmeanzeige

Wenn das Kochfeld nach dem Einsatz abgeschaltet wird, bleibt die Glaskeramik noch einige Zeit heiß - dieser Effekt wird Restwärme genannt. Das Gerät kann die Restwärme der Glaskeramik grob abschätzen. Falls die geschätzte Temperatur 60 °C überschreitet, blinkt ein "H" in der Anzeige der entsprechenden Kochstelle. Die Restwärme wird angezeigt, solange die geschätzte Kochstellentemperatur mehr als 60 °C beträgt.


Die Restwärmeanzeige genießt die niedrigste Priorität und wird von sämtlichen anderen Anzeigen überschrieben; zum Beispiel Anzeigen von Sicherheitsabschaltung und Fehlercodes.

Kochfeld zurücksetzen

Wenn das Kochfeld nach der Installation zum ersten Mal eingeschaltet wird oder ein Stromausfall während des Betriebs eingetreten ist, blinkt ein "H" in einigen oder sämtlichen Kochstellenanzeigen.


In welchen Anzeigen ein "H" angezeigt wird, hängt vom zum Zeitpunkt des Stromausfalls aktiven Betriebsmodus ab.

Dieser Effekt erklärt sich dadurch, dass sich das Kochfeld "merkt", bei welchen Kochstellen noch Restwärme vorhanden war. Dies ist völlig normal und sinnvoll. Zum Zurücksetzen des Kochfeldes halten Sie die Sensortasten der oberen linken Kochstelle, der unteren linken Kochstelle und die Taste  etwa 2 Sekunden lang gleichzeitig gedrückt.

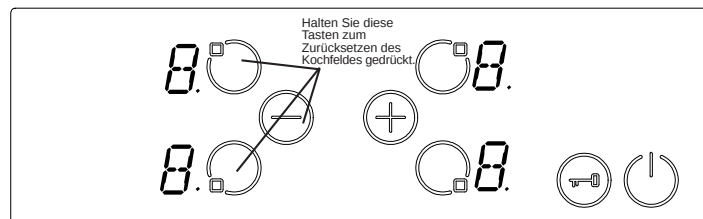

Kochgeschirr mit unebenem Boden (oder mit Rückständen am Boden) sollte nicht benutzt werden, da dies die Glaskeramik verkratzen kann. Der Boden des Kochgeschirrs sollte so dick und flach wie nur möglich sein. Bevor Sie Kochgeschirr benutzen, überzeugen Sie sich davon, dass der Boden sauber und trocken ist.

Stellen Sie das Kochgeschirr grundsätzlich zuerst auf die Kochstelle auf, bevor Sie es einschalten. Setzen Sie wenn möglich immer einen Deckel auf. Der Boden des Kochgeschirrs darf nicht kleiner oder größer als die jeweilige Kochzone sein; bitte beachten Sie die nachstehende Abbildung.

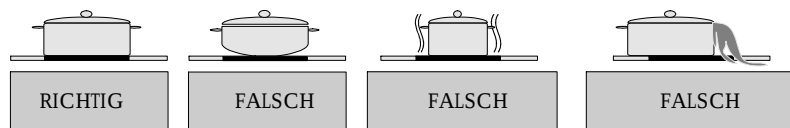

Bevor Sie das Kochfeld reinigen, trennen Sie zuvor grundsätzlich die Stromversorgung. Anschließend vergewissern Sie sich, dass keine Restwärme mehr vorhanden ist. Glaskeramik ist überaus unempfindlich gegenüber hohen Temperaturen und Überhitzung. Falls noch Restwärme in den Kochstellen vorhanden sein sollte, blinkt ein "H" in der Kochstellenanzeige. Lassen Sie das Gerät abkühlen, damit es nicht zu Verbrennungen kommt.

GLASKERAMISCHES KOCHFELD REINIGEN

Vor dem Reinigen vergewissern Sie sich, dass das Kochfeld abgeschaltet ist. Entfernen Sie übergelaufene Lebensmittel und andere Verkrustungen. Staub und Lebensmittelreste entfernen Sie mit einem feuchten Tuch. Wenn Sie Reinigungsmittel verwenden, überzeugen Sie sich davon, dass diese keine scheuernden Bestandteile enthalten. Benutzen Sie keine Scheuermittel; diese können die Glaskeramik des Kochfeldes beschädigen.

Sämtliche Reinigungsmittelreste müssen mit einem feuchten Tuch entfernt werden. Staub, Fett und übergelaufene flüssige Bestandteile von Lebensmitteln müssen so schnell wie möglich entfernt werden.

Wenn solche Verunreinigungen antrocknen, lassen sie sich erheblich schwieriger entfernen.

Dies gilt insbesondere für Zucker, Sirup und ähnliche stark zuckerhaltige Lebensmittel, die irreparable Beschädigungen der Oberfläche verursachen können, wenn sie sich einbrennen.

Falls solche Produkte auf der Glaskeramik schmelzen, sollten diese sofort (solange die Glaskeramik noch heiß ist) mit einem Schaber entfernt werden, damit es nicht zu irreparablen Beschädigungen der Oberfläche kommt. Einen passenden Schaber erhalten Sie im Geschäft, in dem Sie das Kochfeld erworben haben.

Legen Sie keine Gegenstände, die schmelzen können, auf das Kochfeld: Zum Beispiel Kunststoff, Alufolie, Zucker und stark zuckerhaltige Lebensmittel. Berühren Sie die Glaskeramik nicht mit Messern oder anderen scharfen oder spitzen Gegenständen; dies kann zu Beschädigungen der glaskeramischen Oberfläche führen.

Benutzen Sie keine Stahlwolle oder Scheuerschwämme - solche Hilfsmittel können zu permanenten Kratzern führen.

Entsorgung



Elektrische und elektronische Altgeräte dürfen nicht mit dem regulären Hausmüll entsorgt werden. Zur Entsorgung wenden Sie sich bitte an den Händler, bei dem Sie das Gerät erworben haben. Verpackungsmaterialien sollten über örtliche Recycling-Sammelstellen entsorgt werden.

52076794 07/12